

TECHNICAL DATA SHEET

OFFSET - MOUNTING BRACKET p/n MBA-OA-A (G or S)

MATERRIALS: 3/8" 304 OR 316 STAINLESS STEEL, HDG CARBON STEEL, ALUMINIUM

DESCRIPTION


Install vertically or horizontally on the Beam ANKR© Product surface for industrial apparatus typically welded onto the flange surface of an I-beam.

Offset approximately 3" from the Beam ANKR© product surface it allows for wire or hardware fasteners to be easily installed and accessed.

Components and installation hardware are kitted and shipped together as a complete system for ease of assembly and installation on site.



TECHNICAL DATA

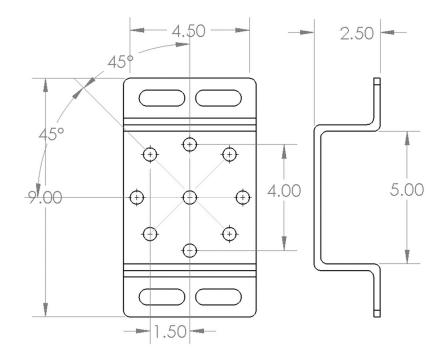

FEATURES

5052 H32 ALUMINUM

WEIGHT: 1.5 LBS

Will Offset Apparatus 3" from Beam ANKR surface within the beam flange

Installs Vertically or Horizonally on the Beam ANKR for easily orienting apparatus.

1979 421 9024

sales@sfindustriesusa.com www.sfindustriesusa.com 1910 EAST TOM GREEN ST STE 1A BRENHAM TEXAS 77833